





TITLE: DIMENSIONAL DRAWING, 320IL

OPTIONAL STAND KIT P/N E455084

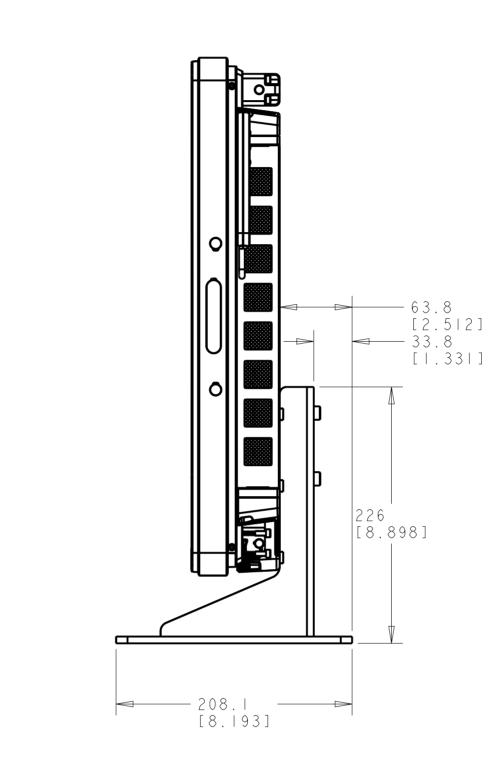

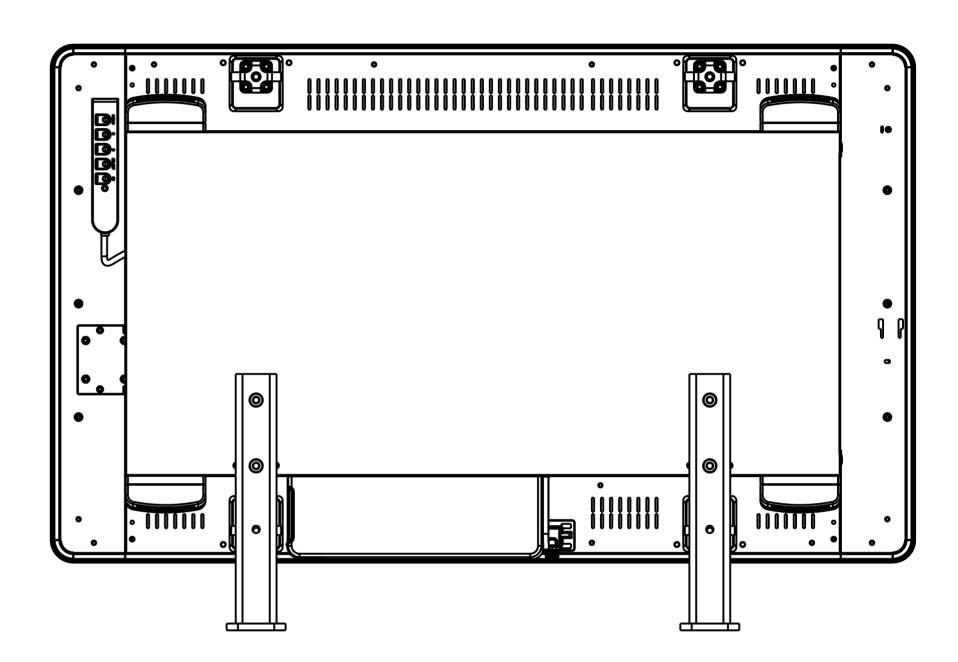





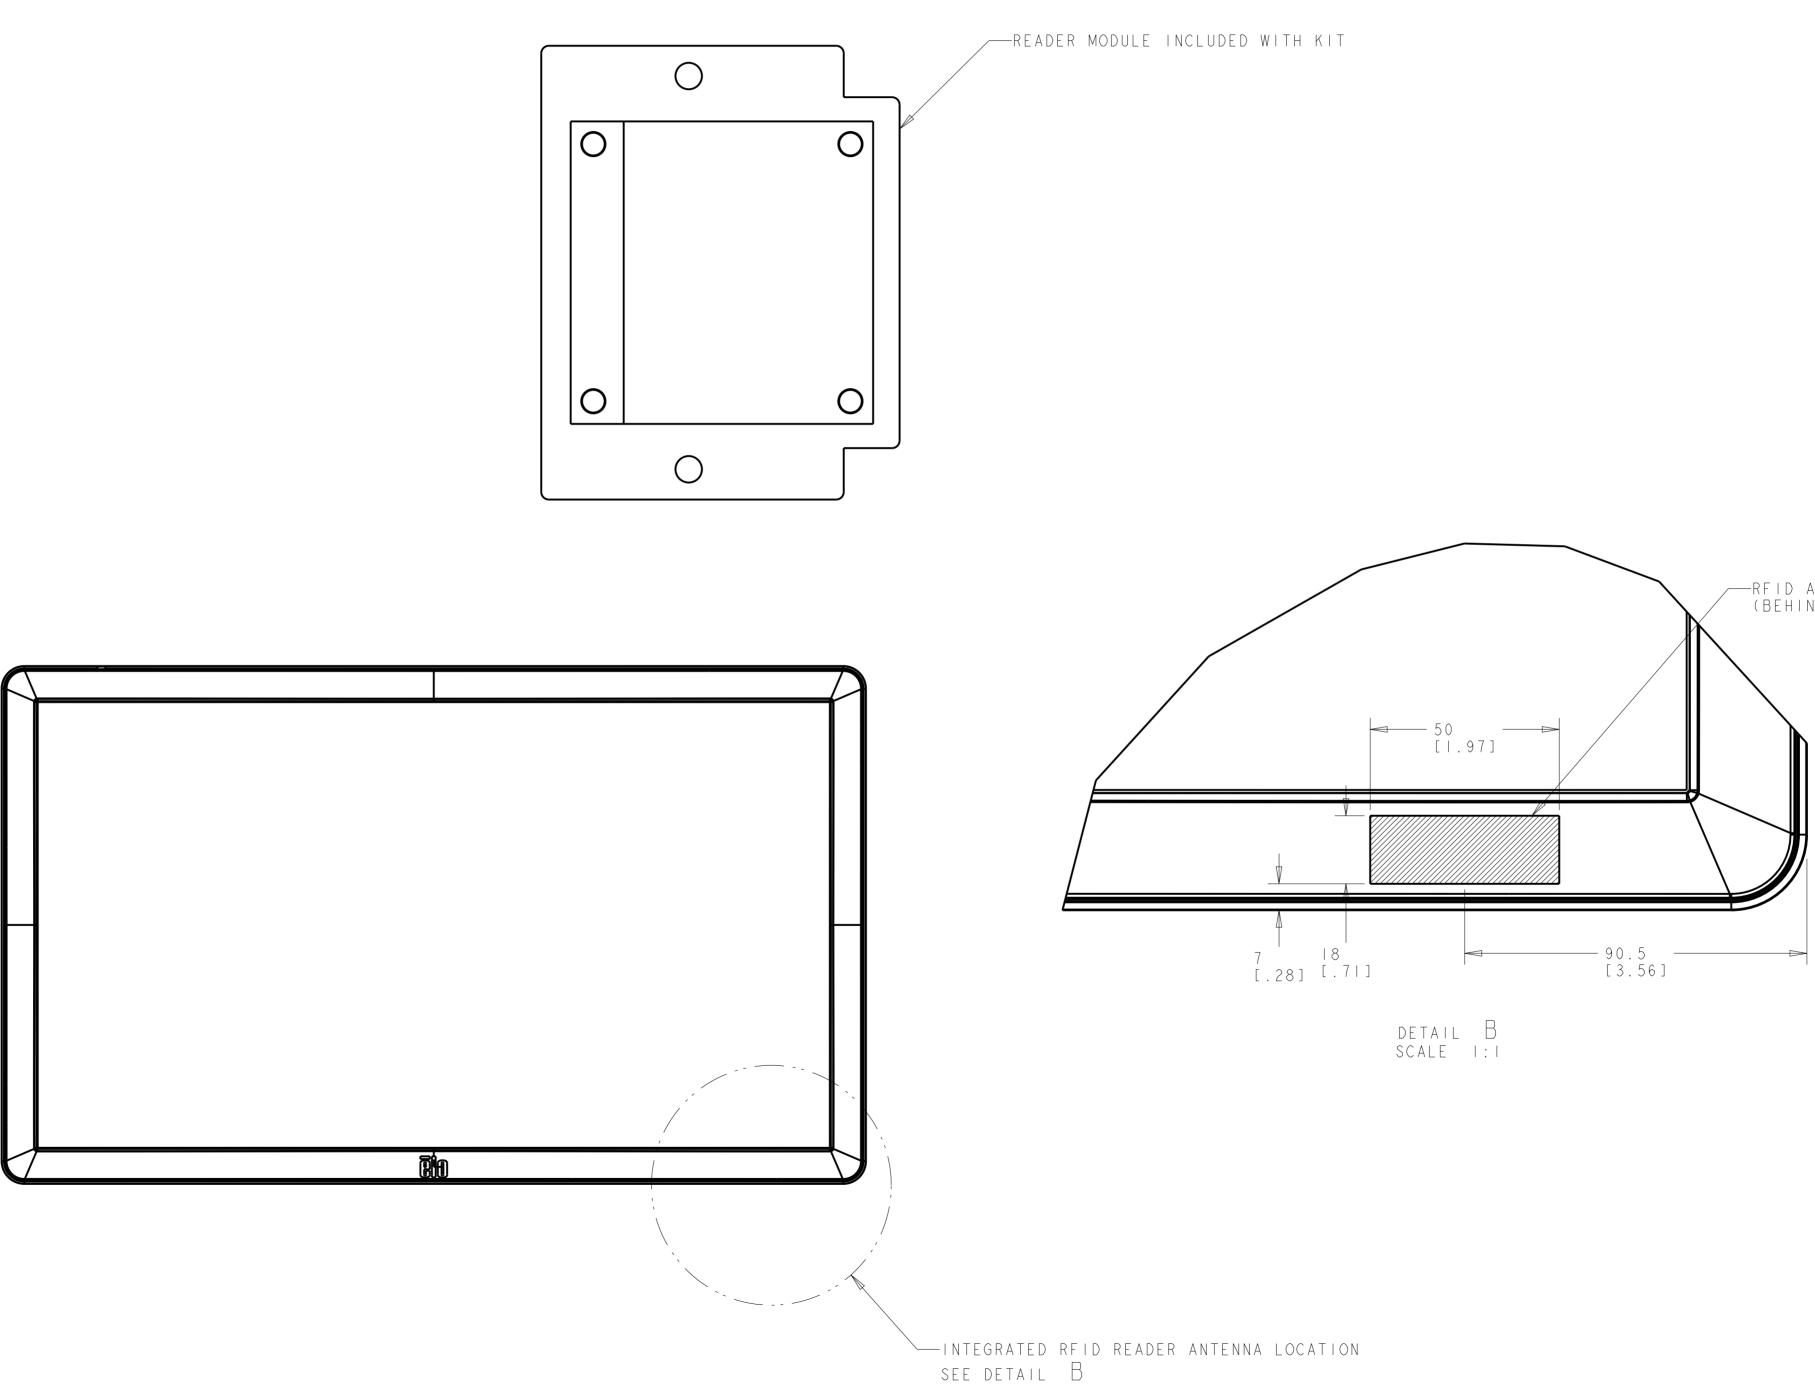


OPTIONAL RFID KIT P/N:E603158


RFID ANTENNA LOCATION (BEHIND BEZEL)







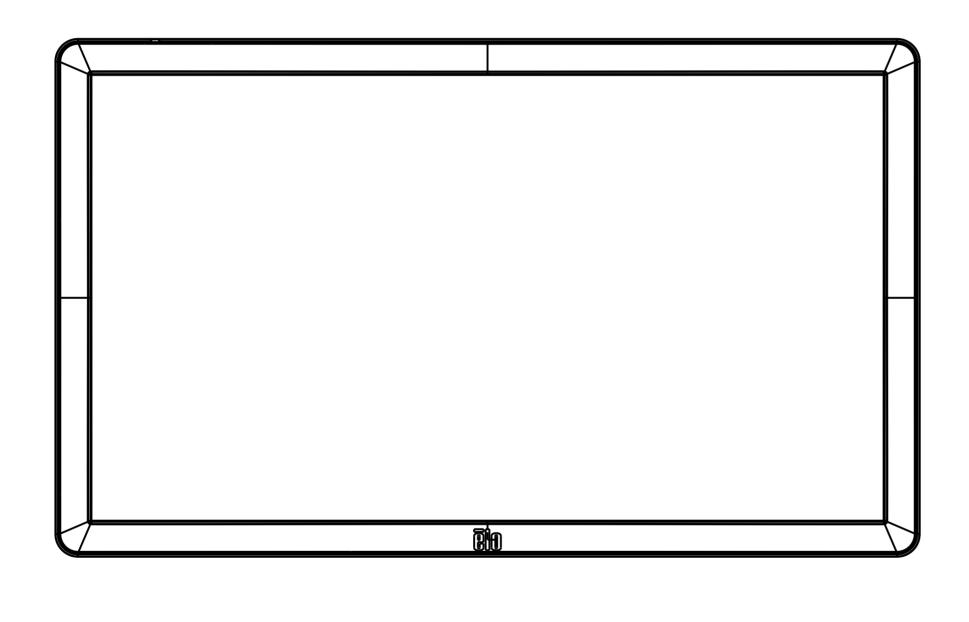

MOUNTING INTERFACE FOR PERIPHERALS (ONE PER SIDE, FOUR TOTAL)




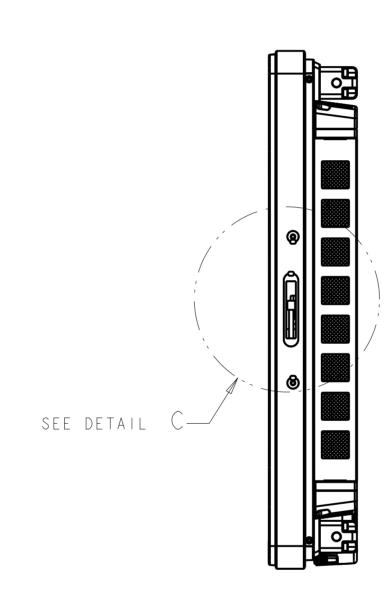


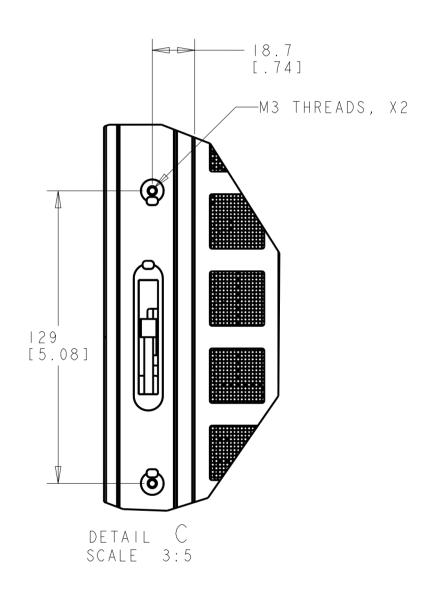





THERMAL RECOMMENDATIONS (PORTRAIT AND LANDSCAPE ORIENTATION)

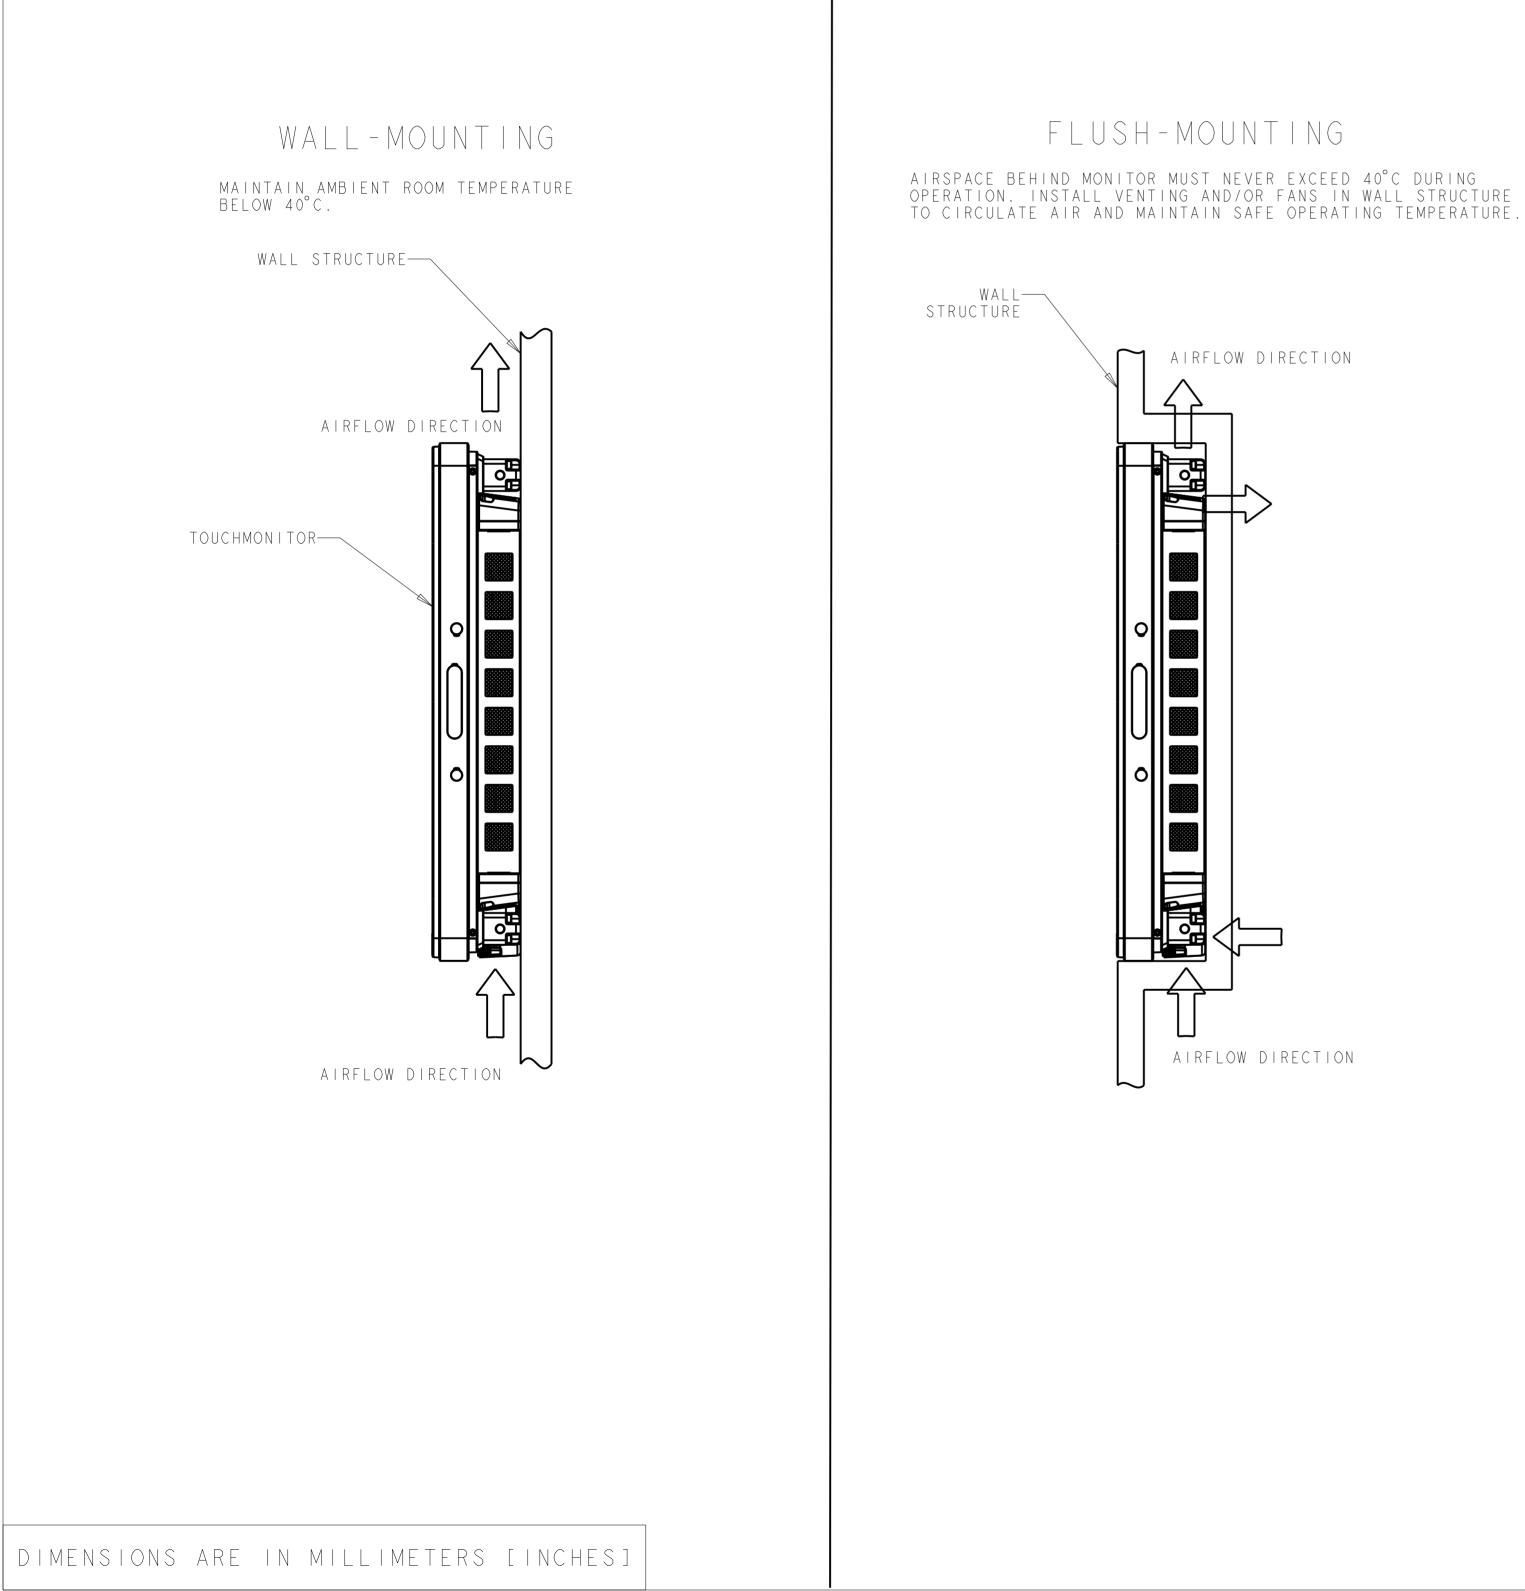

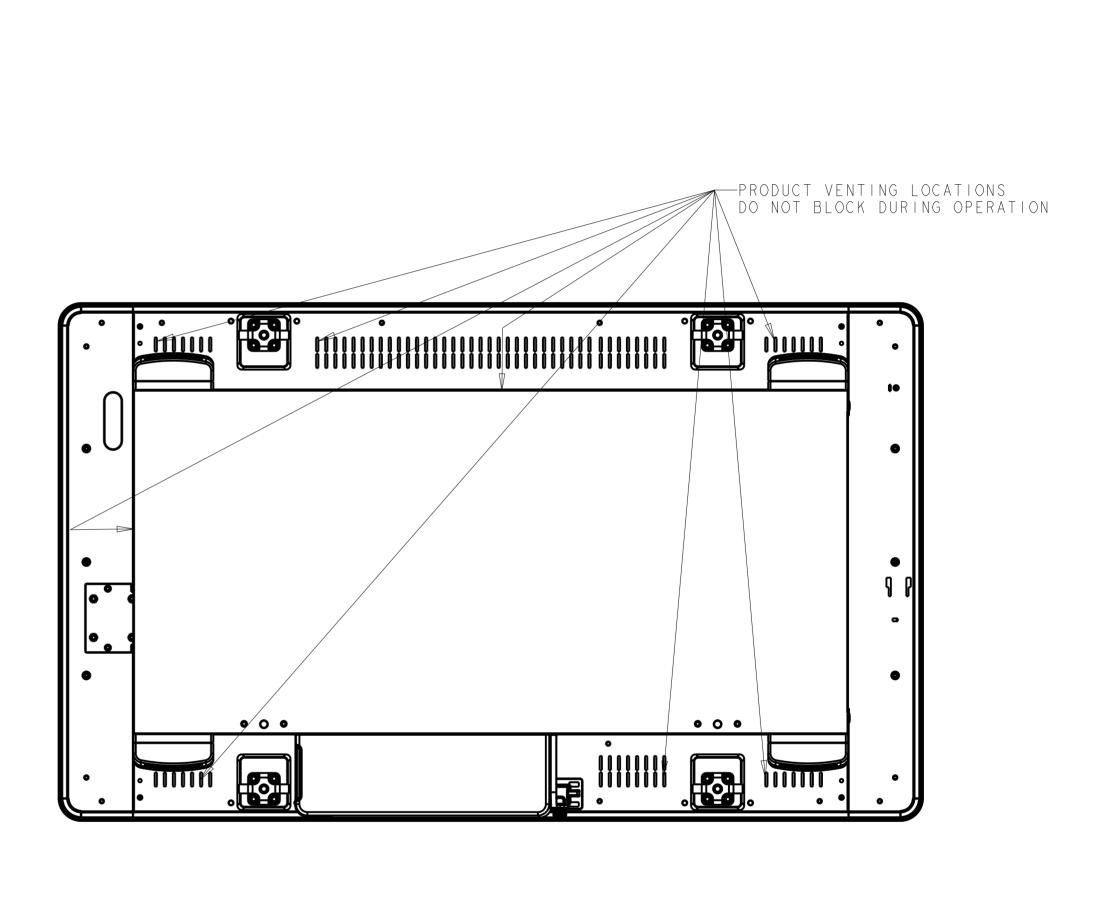




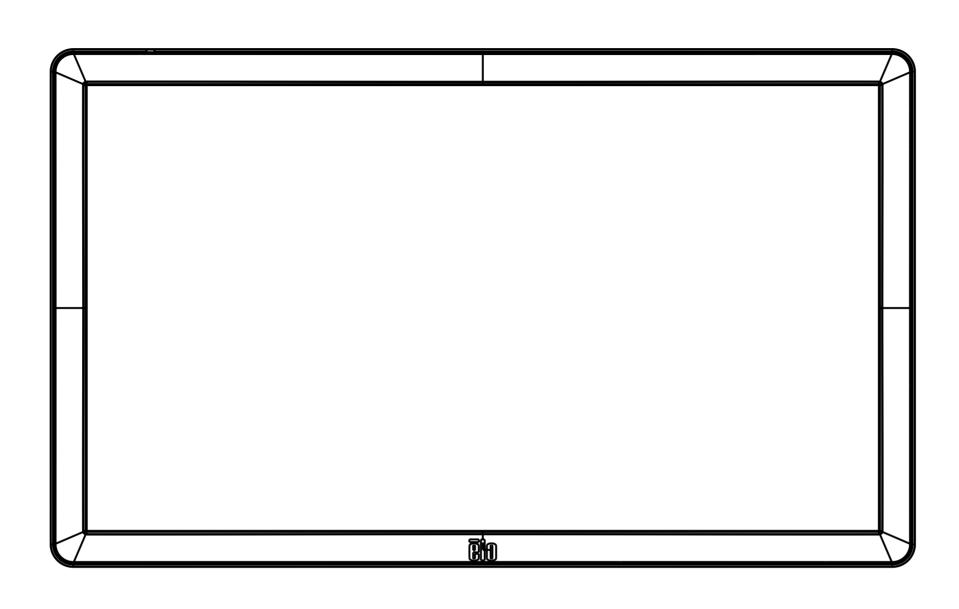

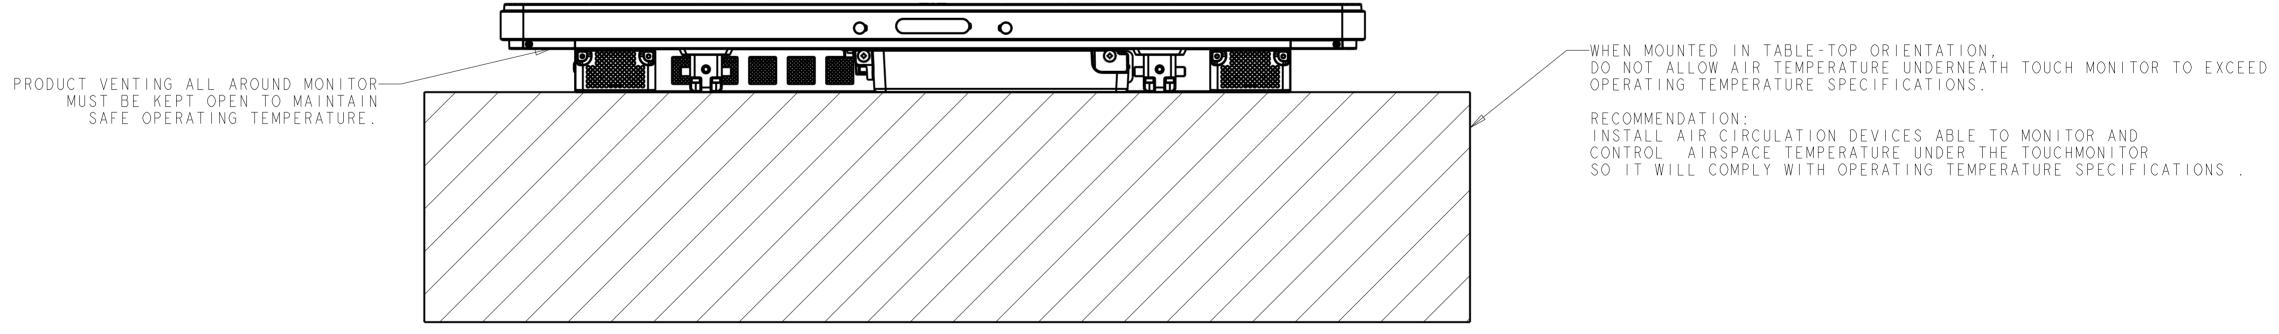


THERMAL RECOMMENDATIONS (TABLE-TOP ORIENTATION)



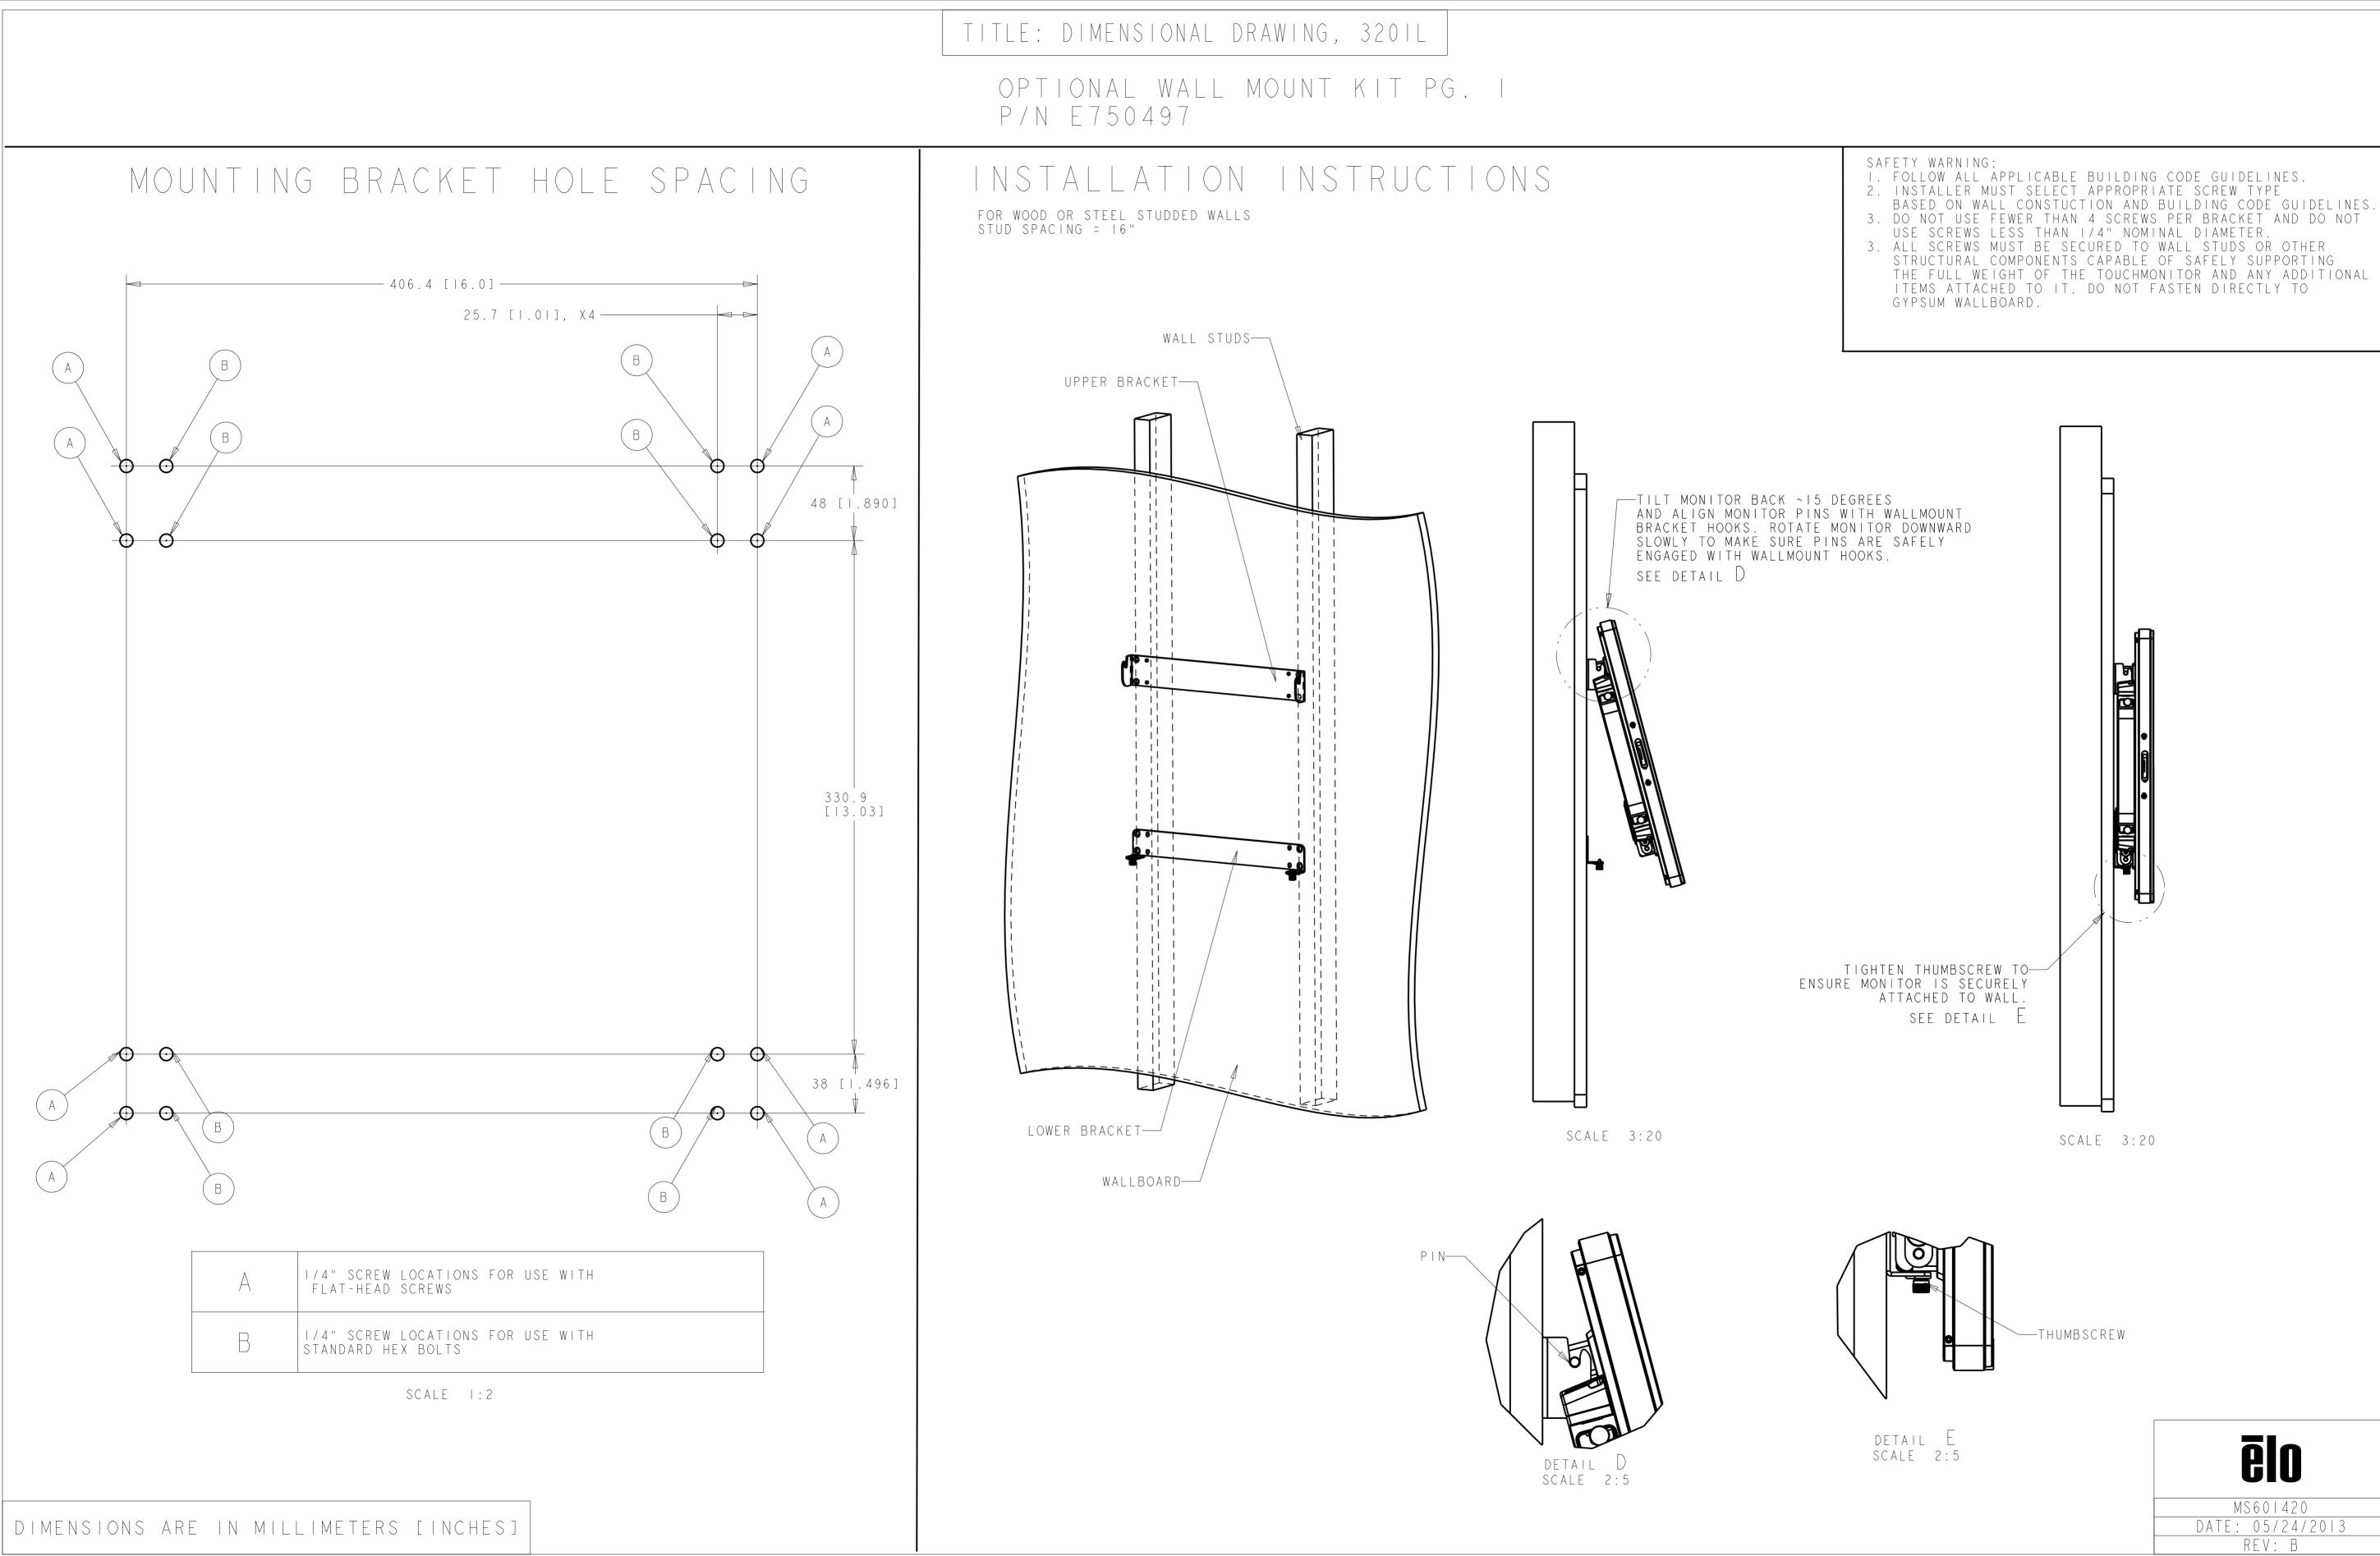

NING:
ALL APPLICABLE BUILDING CODE GUIDELINES.
ER MUST SELECT APPROPRIATE SCREW TYPE
N WALL CONSTUCTION AND BUILDING CODE GUIDELINES.
JSE FEWER THAN 4 SCREWS PER BRACKET AND DO NOT
EWS LESS THAN I/4" NOMINAL DIAMETER.
EWS MUST BE SECURED TO WALL STUDS OR OTHER
RAL COMPONENTS CAPABLE OF SAFELY SUPPORTING
_ WEIGHT OF THE TOUCHMONITOR AND ANY ADDITIONAL
ITACHED TO IT. DO NOT FASTEN DIRECTLY TO
VALLBOARD.

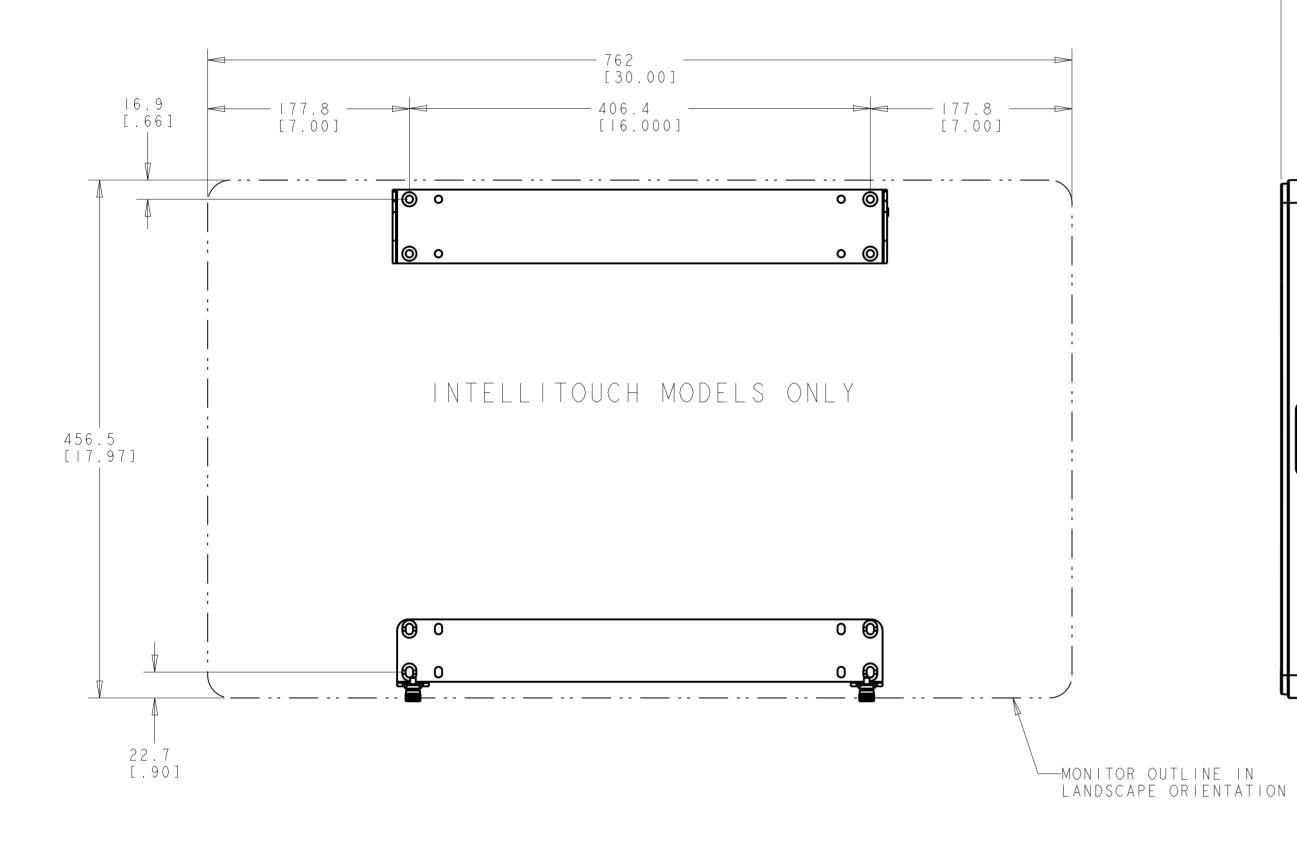

OPTIONAL WALL MOUNT KIT PG. 2 P/N E750497

