


DA2 HD 4K

4K HDMI DISTRIBUTION AMPLIFIER

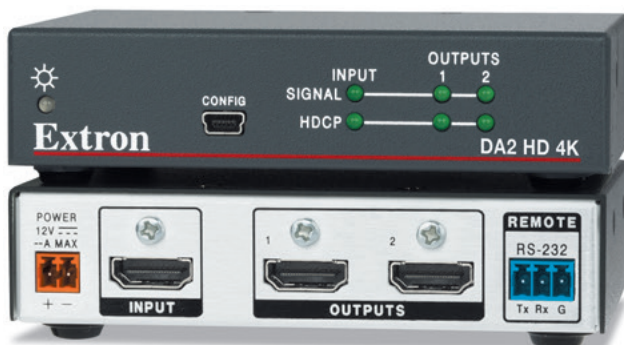

- ▶ Distributes HDMI video and embedded multi-channel digital audio
- ▶ Supports computer and video resolutions up to 4K, including 1080p/60 Deep Color
- ▶ EDID Minder® automatically manages EDID communication between connected devices
- ▶ Key Minder® continuously verifies HDCP compliance
- ▶ Automatic color bit depth management
- ▶ Automatic input cable equalization to 50 feet when used with Extron HDMI Pro Series cable
- ▶ Selectable output muting via RS-232 or USB port
- ▶ HDCP authentication and signal presence LED indicators
- ▶ Provides +5 VDC, 250 mA power on each output for external peripheral devices
- ▶ Easy setup and commissioning with Extron's PCS – Product Configuration Software

The Extron DA2 HD 4K is a one input, two output distribution amplifier for HDMI signals at resolutions up to 4K. It features EDID Minder®, Key Minder®, and automatic color bit depth management to ensure reliable operation for applications that require the distribution of a 4K HDMI source signal to two modern displays.



Extron Electronics
INTERFACING, SWITCHING AND CONTROL


DESCRIPTION

The Extron **DA2 HD 4K** is a one input, two output distribution amplifier for HDMI signals at resolutions up to 4K. It supports data rates up to 10.2 Gbps, including computer and video resolutions up to 4096x2160 and 1080p/60 with Deep Color, 3D, Lip Sync, and HD lossless audio formats. It features EDID Minder that maintains continuous EDID communication between connected devices and Key Minder, which continuously authenticates HDCP encryption between devices to ensure the simultaneous distribution of source content. The DA2 HD 4K distribution amplifier is ideal for applications that require the distribution of a 4K HDMI source signal to two displays.

KEY FEATURES

- ▶ Distributes HDMI video and embedded multi-channel digital audio signals
- ▶ Supports computer and video resolutions up to 4096x2160, including 1080p/60 Deep Color
- ▶ Automatic input cable equalization to 50 feet when used with Extron HDMI Pro Series cable
- ▶ EDID Minder automatically manages EDID communication between connected devices
- ▶ Key Minder continuously verifies HDCP compliance
- ▶ Automatic color bit depth management
- ▶ Selectable output muting via RS-232 or USB port

APPLICATION DIAGRAM

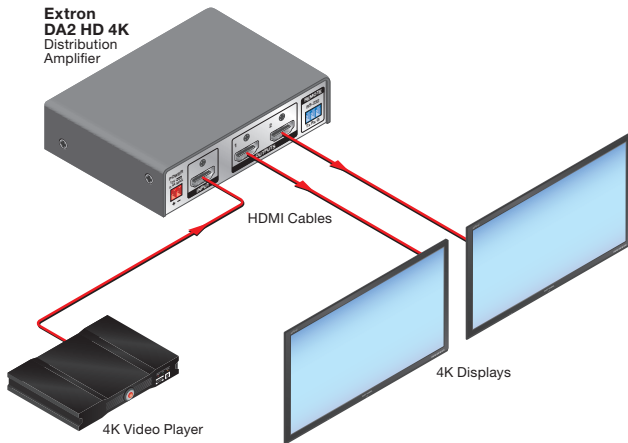

SPECIFICATIONS

TRUE 4K SPECIFICATION	
Resolution	4K (4096x2160) or UHD (3840x2160) Max 30 fps at 4:4:4 color sampling with 8 bits per color
Frame Rate ¹	24, 25, 30, 50, or 60 fps
Color Sampling ¹	4:4:4, 4:2:2, or 4:2:0
Color Bit Depth ¹	8, 10, or 12 bits per color
Signal Type	HDMI / HDCP
Max Video Data Rate	10.2 Gbps (3.4 Gbps per color)
NOTE1: Subject to the maximum data rate limit. Use our calculator to find out max signal data rate.	

VIDEO		
NOTE: *Appropriate DVI-D to HDMI cables or adapters are required for DVI signal input/output.		
Maximum data rate	10.2 Gbps (3.4 Gbps per color)	
Maximum pixel clock	300 MHz	
Resolution range	Up to 1920x1200 or 1080p @ 60 Hz, 12-bit color, 4K (4096x2160) @ 30 Hz, UHD (3840x2160) @ 30 Hz	
Formats	RGB and YCbCr digital video	
Standards	DVI 1.0, HDMI 1.4, HDCP 1.4	
VIDEO INPUT		
Number/signal type	1 single link HDMI (or DVI-D*)	
Connectors	1 female 19-pin HDMI type A	
VIDEO OUTPUT		
Number/signal type	2 single link HDMI (or DVI-D*)	
Connectors	2 female 19-pin HDMI type A	
CONTROL/REMOTE		
Serial control port	RS-232, 3.5 mm, 3-pole captive screw connector	
Baud rate and protocol	9600 baud, 8 data bits, 1 stop bit, non-parity	
Serial control pin configuration	1 = Tx, 2 = Rx, 3 = GND	
USB control port	1 front panel, female, mini USB B	
USB standards	USB 2.0, low speed	
Program control	Extron Simple Instruction Set (SIS™)	
GENERAL		
Power	External Input: 100-240 VAC, 50-60 Hz Output: 12 VDC, 1 A, 12 watts	
Power consumption	Device: 3.3 watts Device and power supply: 4.3 watts	
Temperature/humidity	Storage: -40 to +158 °F (-40 to +70 °C) / 10% to 90%, noncondensing Operating: +32 to +122 °F (0 to +50 °C) / 10% to 90%, noncondensing	
Mounting	Rack mount: Yes, with optional rack shelf kit	
Enclosure dimensions	1.0" H x 4.3" W x 3.0" D (one quarter rack wide) 2.5 cm H x 10.9 cm W x 7.6 cm D (Depth excludes connectors)	
Product weight	0.35 lbs (0.2 kg)	
Warranty	3 years parts and labor	
NOTE: All nominal levels are at ±10%.		
Model	Version Description	Part number
DA2 HD 4K	Two Output 4K HDMI	60-1480-01

For complete specifications, please go to www.extron.com
Specifications are subject to change without notice.

WORLDWIDE SALES OFFICES

Anaheim • Raleigh • Silicon Valley • Dallas • New York • Washington, DC • Toronto • Mexico City • Paris • London • Frankfurt
Stockholm • Amersfoort • Moscow • Dubai • Johannesburg • Tel Aviv • Sydney • Melbourne • New Delhi • Bangalore
Singapore • Seoul • Shanghai • Beijing • Hong Kong • Tokyo

www.extron.com